



AL051

Atom

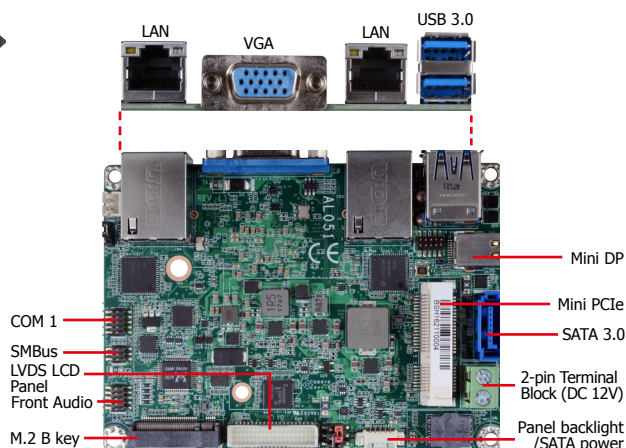

Top View

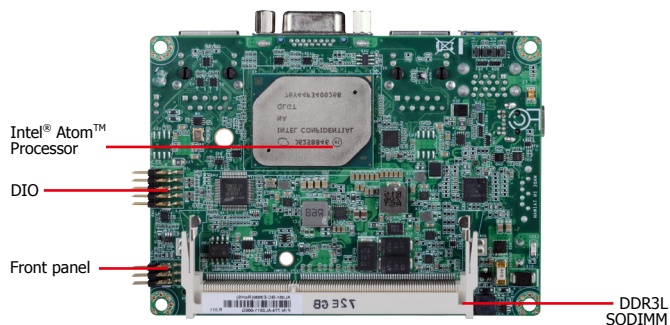


Bottom View

Features

- Small form factor 2.5" Pico-ITX for space-limited applications
- 1 DDR3L SODIMM up to 8GB
- Triple independent displays: VGA + Mini DP++ + LVDS
- Expansion and Storage: 1 Mini PCIe, 1 M.2, 1 SMBus
- Rich I/O: 2 Intel GbE, 1 COM, 2 USB 3.0, 2 USB 2.0


* Populated by default



Mechanical Drawing



Block Diagram

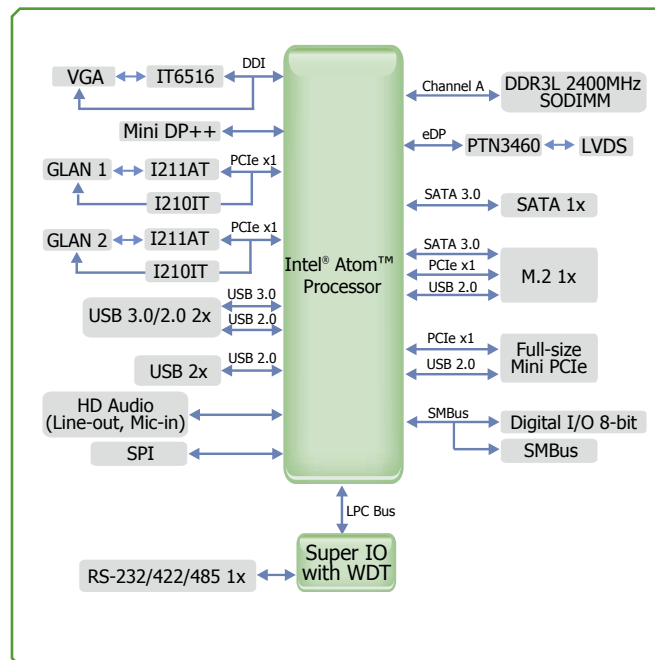

Specifications

SYSTEM	Processor	Intel® Atom™ Processor E3900 Family, BGA 1296 Intel® Atom™ x7-E3950 Processor, Quad Core, 2M Cache, 1.6GHz (2.0GHz), 12W Intel® Atom™ x5-E3940 Processor, Quad Core, 2M Cache, 1.6GHz (1.8GHz), 9.5W Intel® Atom™ x5-E3930 Processor, Dual Core, 2M Cache, 1.3GHz (1.8GHz), 6.5W Intel® Pentium® Processor N4200, Quad Core, 2M Cache, 1.1GHz (2.5GHz), 6W Intel® Celeron® Processor N3350, Dual Core, 2M Cache, 1.1GHz (2.4GHz), 6W
	Memory	One 204-pin SODIMM up to 8GB Single Channel DDR3L 2400MHz
	BIOS	Insyde SPI 64Mbit
	Controller	Intel® HD Graphics
GRAPHICS	Feature	OpenGL 4.2, Direct X 11.1, OpenCL 1.2, OGL ES 3.0 HW Decode: H.264, MPEG2, VC1, VP8, H.265, MPEG4 HW Encode: H.264, MPEG2, MPEG4
	Display	1 x Mini DP++ 1 x VGA 1 x LVDS Mini DP++: resolution up to 4096x2160 @ 60Hz VGA: resolution up to 2048x1536 @ 50Hz LVDS: dual channel 18/24-bit, resolution up to 1920x1200 @ 60Hz
	Triple Displays	VGA + Mini DP++ + LVDS
	Interface	1 x Full-size Mini PCIe (PCIe/USB 2.0) 1 x M.2 (PCIe/USB 2.0/SATA 3.0)
EXPANSION	Audio Codec	Realtek ALC262-VC2-GR
AUDIO	Controller	1 x Intel® I211AT PCIe (10/100/1000Mbps) 1 x Intel® I210IT PCIe (10/100/1000Mbps)
ETHERNET	Ethernet	2 x GbE (RJ-45)
REAR I/O	USB	2 x USB 3.0
	Display	1 x Mini DP++ 1 x VGA 1 x LVDS
	Serial	1 x RS-232/422/485 (1.27mm pitch, right angle type)
INTERNAL I/O	USB	2 x USB 2.0 (1.27mm pitch)
	Display	1 x LVDS LCD Panel Connector
	Audio	1 x Audio (Line-out/Mic-in)
	SATA	1 x SATA 3.0 (up to 6Gb/s)
	DIO	1 x 8-bit DIO
	SMBus	1 x SMBus
WATCHDOG TIMER	Output & Interval	System Reset, Programmable via Software from 1 to 255 Seconds
SECURITY	TPM	Available Upon Request
POWER	Type	Single 12V +/-10% DC
	Connector	2-pin Terminal Block
	RTC Battery	CR2032 Coin Cell
	Microsoft/Linux	Windows 10 IoT Enterprise 64-bit Ubuntu 16.04
OS SUPPORT	Temperature	Operating: 0 to 60°C (Option: -20 to 70°C / -40 to 85 °C) Storage: -40 to 85°C
ENVIRONMENT	Humidity	Operating: 5 to 90% RH Storage: 5 to 90% RH
	Dimensions	2.5" Pico-ITX Form Factor 100mm (3.94") x 72mm (2.83")
	Height	PCB: TBD Top Side: TBD, Bottom Side: TBD

Ordering Information

Model Name	P/N	Processor	Memory	Display	GbE	RS-232/422/485	USB 3.0	USB 2.0	Power	Thermal	Temp.
AL051-BC-E3930	770-AL0511-000G	X5-E3930	1 SODIMM	VGA + LVDS + Mini DP++	2	1	2	2	12VDC	Fanless	0 to 60°C
AL051-BC-E3940	770-AL0511-100G	X5-E3940	1 SODIMM	VGA + LVDS + Mini DP++	2	1	2	2	12VDC	Fanless	0 to 60°C
AL051-BC-E3950	770-AL0511-200G	X7-E3950	1 SODIMM	VGA + LVDS + Mini DP++	2	1	2	2	12VDC	Fanless	0 to 60°C
AL051-BC-N3350	770-AL0511-300G	N3350	1 SODIMM	VGA + LVDS + Mini DP++	2	1	2	2	12VDC	Fanless	0 to 60°C
AL051-EC-E3930	770-AL0511-400G	X5-E3930	1 SODIMM	VGA + LVDS + Mini DP++	2	1	2	2	12VDC	Fanless	-20 to 70°C
AL051-TC-E3930	770-AL0511-500G	X5-E3930	1 SODIMM	VGA + LVDS + Mini DP++	2	1	2	2	12VDC	Fanless	-40 to 85°C

Note: N4200 is supported upon request with MOQ requirement.

Packing List

• 1 AL051 board	
• 1 Serial ATA data cable (Length: TBD)	TBD
• 1 Y cable for SATA and inverter power (Length: TBD)	TBD
• 1 Heat spreader (Height: 11mm)	TBD

Optional Items

• USB port cable (Length: TBD)	TBD
• 1 COM port cable	TBD
• Power adapter (60W, 12V)	TBD
• Heat sink (Height: TBD)	TBD
• 1 Audio cable (Length: TBD)	TBD