

M.2 SSD



SATA III 6Gb/s MTS420 M.2 SSD


Transcend's MTS420 with SATA III 6Gb/s interface and ultra compact dimensions makes it best suited to address the high-performance needs and strict size limitations of small form factor devices. This means it is perfect for use in today's modern ultrabooks, thin and light notebooks, and tablets. Built with the latest SATA III 6Gb/s specifications, and with a powerful controller and exceptional transfer speeds, the M.2 SSD easily handles everyday computing tasks as well as demanding multimedia applications.

Features

- Space-saving M.2 form factor (42mm) – ideal for mobile computing devices
- Supports DevSleep mode, which allows devices to completely shut down the SATA interface and conserve battery life unlike existing partial/slumber states
- Supports S.M.A.R.T., TRIM and NCQ command
- RoHS compliant

Specifications

Type	A (mm)	
	Nominal	Tol
2230	30.0	± 0.15
2242	42.0	± 0.15
2260	60.0	± 0.15
2280	80.0	± 0.15
22110	110.0	± 0.15

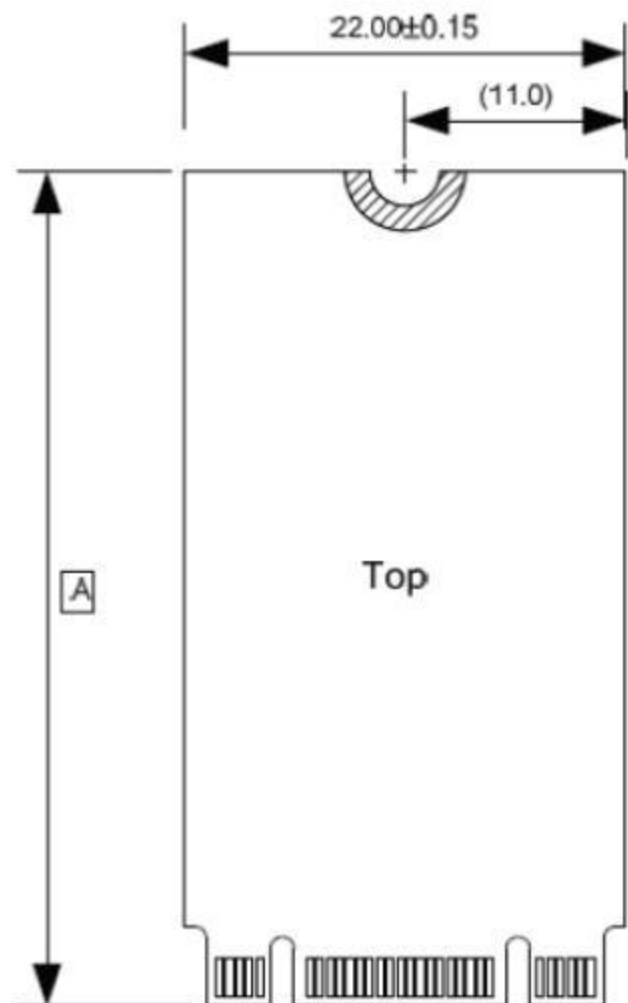

Interface (connector)	M.2 module notch B+M
Form Factor	M.2 TYPE 2242-D5-B-M
Dimensions (mm)	42.0mm × 22.0mm × 3.58mm (1.65" x 0.87" x 0.14")
Flash Type	3D TLC
Capacity(GB)	120GB
Weight	8g (0.28 oz)
Max. Performance (Vary by density)	Read: 560MB/s, Write: 500MB/s
Op. Voltage(V)	DC 3.3V±5%
Power Consumption (W)	1.91W (Active), 0.4W (Idle)
Op. Temp.(°C)	0°C~70°C

Due to the complexity and variety of industrial applications, Transcend cannot guarantee 100% compatibility with all platforms and under all scenarios.

For special applications and environments, it is strongly suggested to contact Transcend beforehand for clarification.